

# TW 2000H-200W-40 BOOSTER STATION

Steel Frame Primed and Painted for Rust Protection



Variable Speed Controllers and Disconnect Boxes



Pneumatic Tank to be placed near system




**TOWLE WHITNEY LLC**  
 Email: ned@towle-whitney.com  
 Web: www.towle-whitney.com  
 Toll Free: 800-807-9827  
 Tel: 603-626-7371  
 Fax: 603-626-7372

**Specifications:**

- Pumps: Walrus of America
- Variable Speed Controller: Emerson or Equal
- Assembler: Towle Whitney LLC
- Power Options: 208-220V/3 PH/20Amp  
or 360-480V/3PH/20Amp
- 2 Independent circuits required
- Pumps: TPH25T-3K
- HP: 5 HP per Pump
- Suction: 3" Flanged
- Discharge: 3" Flanged
- Flow Rate: 200 GPM Total Capacity
- Boost: 40 PSI
- Manifolds: 3" Type L Copper
- Headers: Horizontal Roll Grooved
- Tank: Flotec FP7125

System may vary from picture shown  
 Some assembly required

**37" W x 33"D x 60"H**

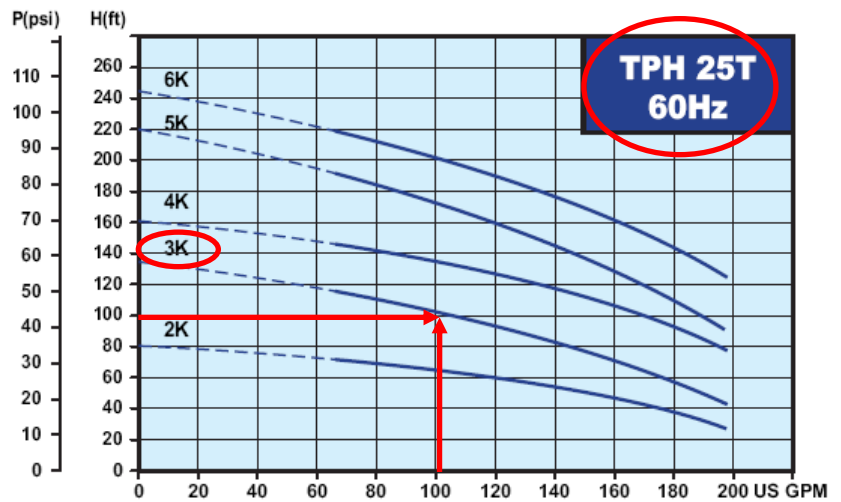

Warrantees are passed through and as published in the Original Equipment Manufacturer's literature that is included with this system. In no event shall Towle Whitney LLC be liable for incidental or consequential damages, or limitation on how long an implied warranty lasts. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Water damage exclusion: It is understood that Towle Whitney LLC accepts no responsibility for water damage regardless of what or who caused water damage or any consequential personal injuries, liabilities or property damages resulting.